


Symbol LS-4208 Configuration Sheet


1. Set All Defaults




2. IBM PC/AT & IBM PC Compatibles

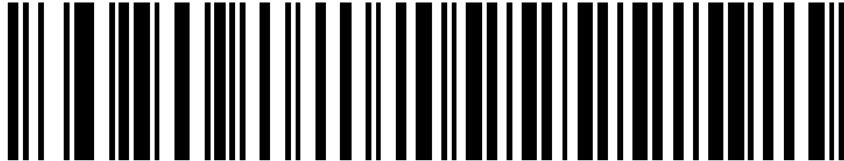

3. Do Not Transmit UPC-A Check Digit



4. Do Not Transmit UPC-E Check Digit

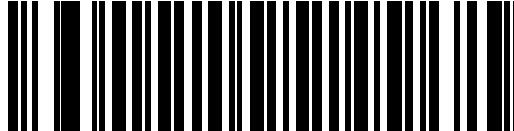

5. Scan Options



6. <DATA> <SUFFIX>



7. Enter

