



Symbol LS-9208 Configuration sheet


1. Set All Defaults

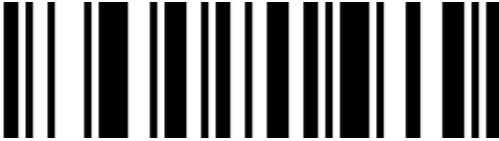

2. Do Not Transmit UPC-A Check Digit

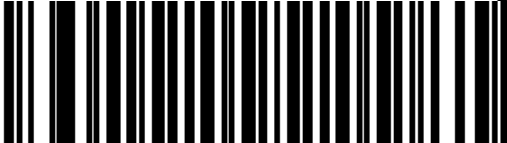

3. Do Not Transmit UPC-E Check Digit

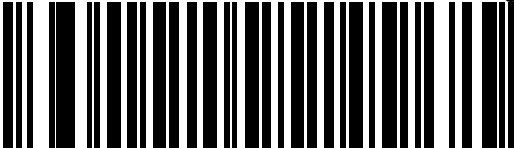


4. Scan Options




Symbol LS-9208 Configuration sheet (continued)

5.<DATA> <SUFFIX>

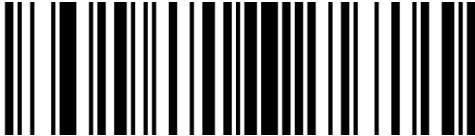

6.Enter

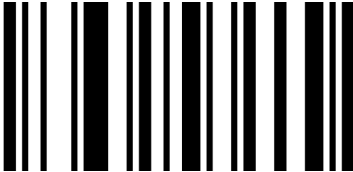

7.IBM PC/AT & IBM Compatibles

